

# LINIAN Product Range and Sizing Guides



CONTENTS

Why LINIAN?	03
About LINIAN	03
Our Range	04
- FireClip™	06
- SuperClip™	08
- T&E Clip™	10
- Coaxial Clip™	12
- Nano Clip™	14
- Earth Rod Pro™ Range	16
Product List and Sizing Guides	18
LINIAN Product List	18
- Samples	18
- FireClip™ Range	18
- SuperClip™ Range	19
- T&E Clip™ Range	20
- Coaxial Clip™ Range	21
- Earth Rod Pro™ Range	21
- Cable Tie Packs	21
LINIAN Sizing Guides	22
- FP 200 Gold - Fire Alarm Cable	22
- FP 200 Plus - Fire Alarm Enhanced	24
- FP600's - Fire Rated Heavy Duty SWA Power Cable	25
- FP 400 - Fire Rated SWA Cable	26
- PVC Insulated Flex	28
- SWA Armoured Power Cable Standard	31
- SWA Armoured Power Cable LS(H)F	34
- Conduit	37
Substrates	39
Specialist Colours	40
Small Parts Coating	41
LINIAN Labs	41
Become a stockist	42
Testimonials	43

At LINIAN we view the world differently...

Where some are content to serve the industry as it is, we look for ways to drive it forward and raise standards. Through direct experience, our products solve real industry challenges, and make installations Faster, Safer and Simpler across the Electrotechnical Sector. We are proud to manufacture these products in Britain.

Being family run is at the core of our business. It has allowed us to forge a company-wide culture of honesty, determination and restless innovation that can be seen in everything we do.

WHAT WE DO

At LINIAN we develop fast fit products for Cable Management, Earthing and more.

Our famous flagship products, the LINIAN cable clips, were designed to quickly prevent the premature collapse of cables in the event of a fire – eliminating the need for plastic plugs, screws or washers.

Effortless installation, aesthetically pleasing and certified to the highest standards LINIAN products are fast becoming the go-to products for Installers and Designers alike. A quick and simple solution to meet the toughest criteria on projects.

- **Nanoclip™** - Designed for Fibre and other small diameter cables from 0.9mm – 3.8mm OD.

- **FireClip™** - Intended for all round cables with a 4-14mm OD, suitable for PVC trunking.

- **SuperClip™** - Perfect for SWA cables, bunched cables and PVC conduit with a 12-25mm OD.

- **T&E Clip™** - Invisible finish for T&E, twin and CPC cabling. Suitable for PVC trunking.

- **Coaxial Clip™** - Impeccable finish for retrofit CCTV, AV and Satellite TV installations.

- **Earth Rod Pro™** - A simple and effective solution to bore through hard top layers and underground rock to achieve a secure Earth Rod connection first time.

With innovation and safety at the heart of LINIAN, you can rest assured that we'll be conquering problems you haven't encountered yet.



## OUR RANGE



**FIRECLIP™**



**SUPERCLIP™**



**T&E CLIP™**



**COAXIAL CLIP™**



**NANO CLIP™**




**EARTH ROD PRO™**

The World's First  
Single Component  
Fire Rated Fixing

# FIRECLIP™

- Round cables and PVC Trunking
- Single and double
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable

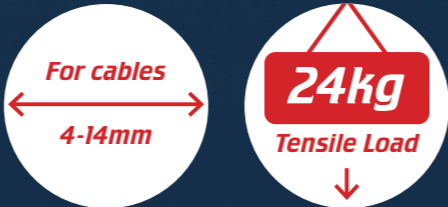

## FIRECLIP™

For Single or Double  
cable applications

70% quicker to install  
than traditional methods


18th Edition and  
Fire-Rated Cable Fixing,  
Safe and Compliant

90 & 120 minute fire  
resistant, meeting BSi  
and DIN classifications

Smoke emission tested  
to London Underground  
Standard

>1200 degrees Celsius  
melting point

Can be used with mini  
trunking alignment

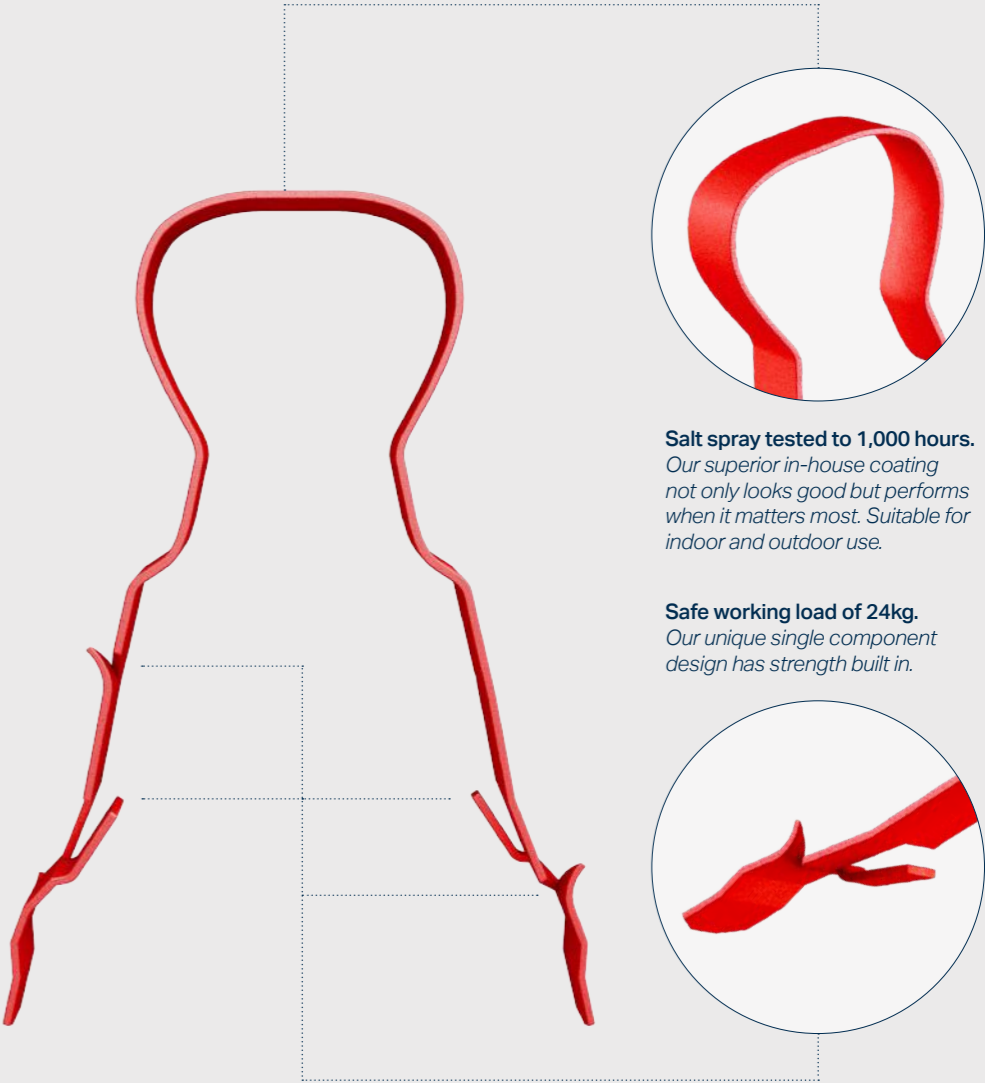

### FAST AND EASY TO INSTALL


No need for plugs,  
screws and washers  
– just drill your hole,  
slide our clip over  
the cable, and push  
it into the wall.

\*Softer substrates – Plaster,  
Plasterboard, etc.  
\*Harder substrates – Concrete,  
Masonry, Timber, etc.

Drill a hole in  
your substrate.  
We suggest  
a Ø5mm hole  
for softer  
substrates\*  
and Ø6mm  
for harder  
substrates\*  
to a depth  
of 30mm.

Slide the clip  
over the cable.  
Make sure it's  
seated in the  
rounded area  
of the clip.

Compress and  
push it into the  
wall.  
Pinch the legs  
together and  
push into the

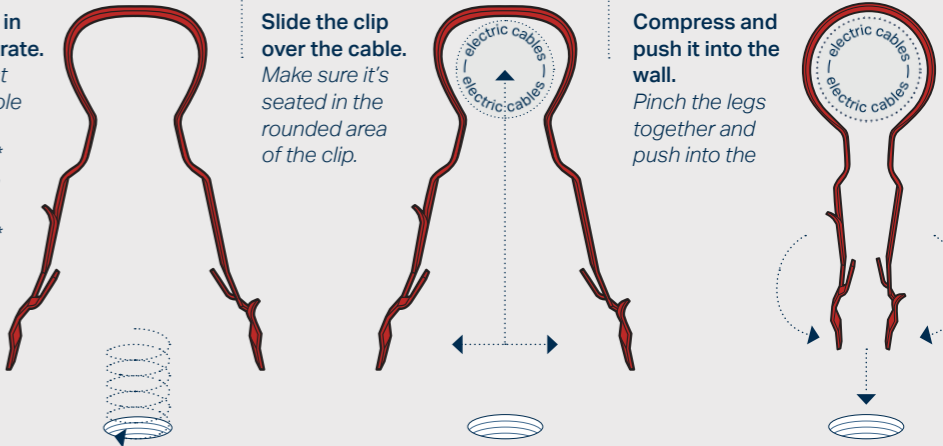

### THE INDUSTRY STANDARD

Fast becoming the  
industry standard  
– FireClip™ meets  
all current industry  
regulations, and  
surpasses a few too.

British Standards:  
– BS7671: Amendment 3  
– BS7671: 18th Edition 2018  
– BSEN50200 PH120  
– BS8519: 2010

European Standards:  
– DIN 4102-12 E90

4mm — 14mm  
Soft skin, flex and round  
cables. Single and doubles.


Versatile  
Can hold cable from Ø4mm up to  
Ø14mm. Available in a variety of  
colours including Red, Black or White.



# Our Strongest Single Component Fixing

# SUPERCLIP™

- SWA cables, PVC/metal conduit
- Bunched cables
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable
- Can be used with steel cable ties



## SUPERCLIP™

**Suitable for** SWA Cable, Conduit and bunched cables for neat cable installation

**Anchor fixings** for wire and bunched cable

**70% quicker** to install than traditional methods

**90 & 120 minute fire resistant**, meeting BSi and DIN classifications

**Corrosion resistant** and UV stable, suitable for indoor and outdoor use

**18th Edition** and Fire-Rated Cable Fixings, Safe and Compliant

**No need for** conduit saddles

Perfect for **fast and neat** EV installs



**Suitable for armoured cable and trunking.** Our SuperClip can accommodate cable, conduit and trunking widths of 12–25mm.


**Safe Working Load of 44kg.** Our unique single component design has strength built in.




### FAST AND EASY TO INSTALL

**No need for plugs, screws, washers conduit saddles or plastic/aluminium cleats** – just drill your hole, slide our clip over the cable, and push it into the wall.


**Drill a hole in your substrate.** We suggest a Ø10mm hole at a depth of 40mm for all substrates.

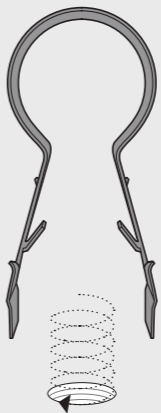

**Slide the clip over the cable.** Make sure it's seated in the rounded area of the clip.

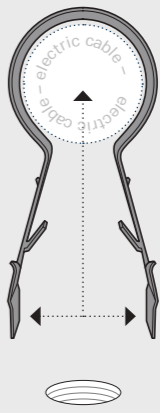

**Compress and push it into the wall.** Pinch the legs together and push into the

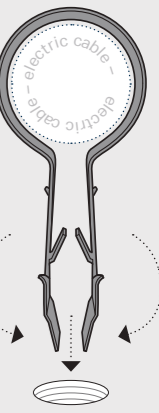


### THE INDUSTRY STANDARD

**Fast becoming the industry standard** – SuperClip™ meets all current industry regulations, and surpasses a few too.

**British Standards:**  
– BS7671: Amendment 3  
– BS7671: 18th Edition 2018  
– BSEN50200 PH120  
– BS8519: 2010

**European Standards:**  
– DIN 4102-12 E90

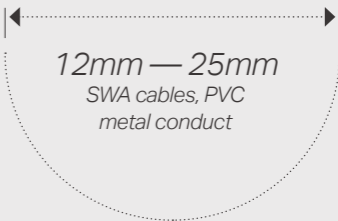

**Versatile**  
Can hold cable conduit and armoured (SWA) from Ø12mm up to Ø25mm. Available in a variety of colours including Red, Black, White or Galvanised.



The Most Versatile  
Way to Install and  
secure T&E Cables

# T&E CLIP™

- Twin, cpc cabling and PVC trunking
- Anchor fixings for wire etc.
- Corrosion resistant & UV Stable

For cables

1-10mm

24kg

Tensile Load

## T&E CLIP™


**Suitable for** twin, cpc cabling and PVC trunking

**Anchor fixings** for wire and bunched cable

**18th Edition** and Fire-Rated Cable Fixings, Safe and Compliant

**90 & 120 minute fire resistant**, meeting BSi and DIN classifications

**Corrosion resistant** and UV stable, suitable for indoor and outdoor use

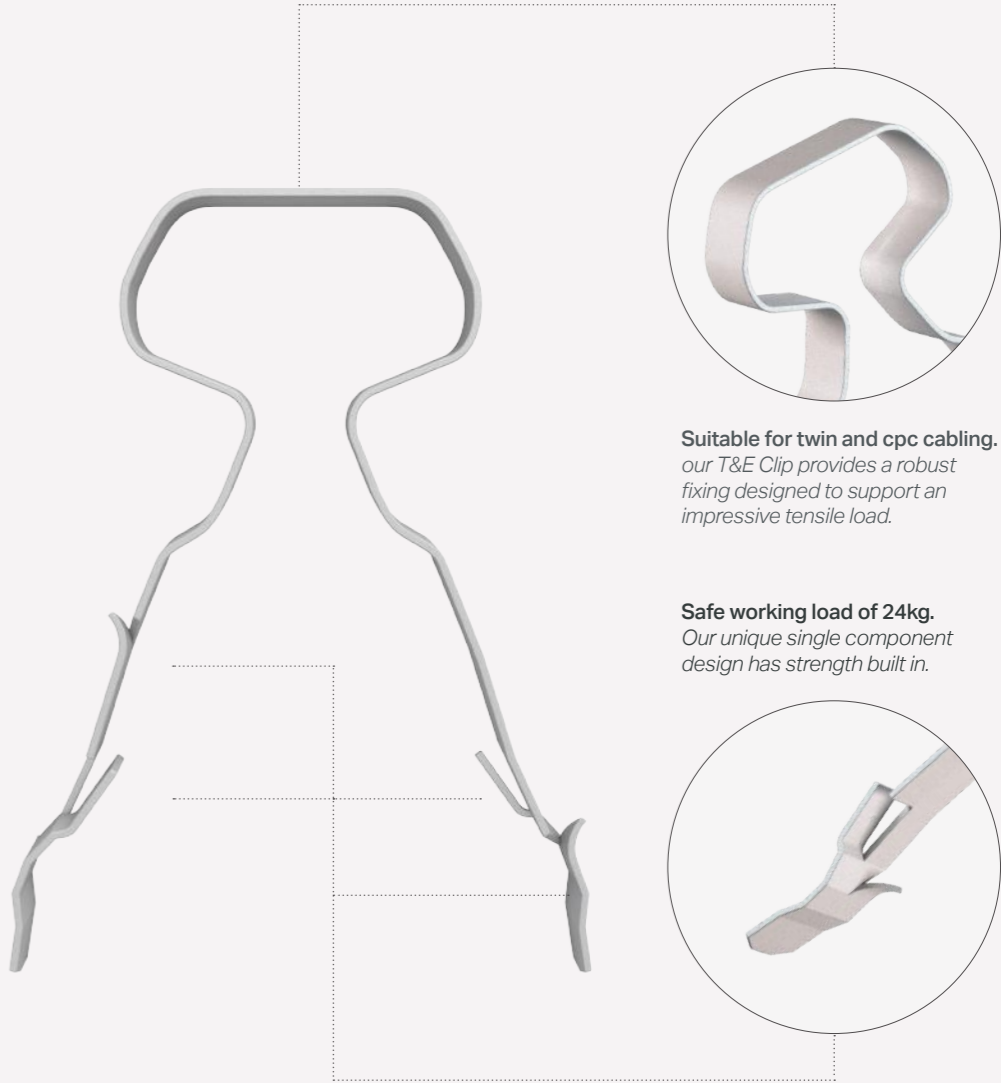

**Suitable for twin and cpc cabling.** Our T&E Clip provides a robust fixing designed to support an impressive tensile load.


**Safe working load of 24kg.** Our unique single component design has strength built in.

### FAST AND EASY TO INSTALL


**No need for plugs, screws, washers or nail in clips – just drill your hole, slide our clip over the cable, and push it into the wall.**

\*Softer substrates – Plaster, Plasterboard, etc.  
\*Harder substrates – Concrete, Masonry, Timber, etc.


**Drill a hole in your substrate.** We suggest a Ø5mm hole for softer substrates\* and Ø6mm for harder substrates\* to a depth of 30mm.

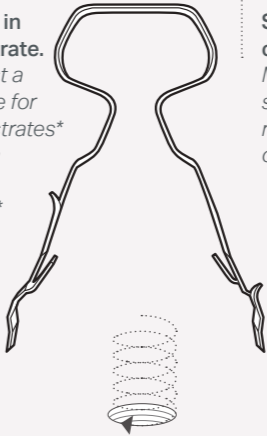

**Slide the clip over the cable.** Make sure it's seated in the rounded area of the clip.

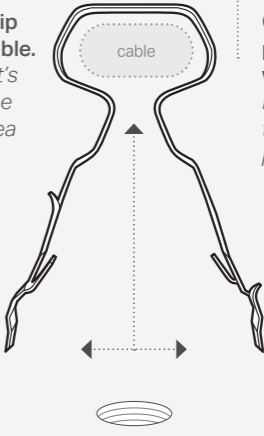

**Compress and push it into the wall.** Pinch the legs together and push into the

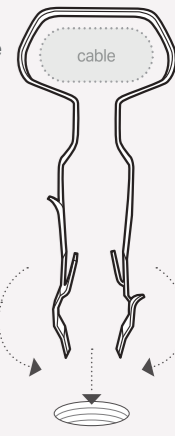

### THE INDUSTRY STANDARD

**Fast becoming the industry standard** – T&E Clip™ meets all current industry regulations, and surpasses a few too.

**British Standards:**  
– BS7671: Amendment 3  
– BS7671: 18th Edition 2018  
– BSEN50200 PH120  
– BS8519: 2010

**European Standards:**  
– DIN 4102-12 E90

**1mm — 10mm**  
Flat Twin & Earth cable  
(624Y Twin & Earth PVC Cable BS6004)


**Versatile**  
Can hold cable from Ø1mm upto Ø10mm. Available in grey or white.



# The Fastest Way to Install Coaxial Cables



- For CCTV, AV and Satellite TV installations
- For indoor and outdoor use
- Corrosion resistant & UV Stable



## COAXIAL CLIP™


**To suit** RG59 Coaxial  
'Shotgun' Cabling

**Quick installation** for  
CCTV, AV and Satellite  
TV installations

**18th Edition** and  
Fire-Rate Cable Fixing,  
Safe and Compliant

**90 & 120 minute fire  
resistant**, meeting BSi  
and DIN classifications

**Corrosion resistant**  
and UV stable, suitable for  
indoor and outdoor use

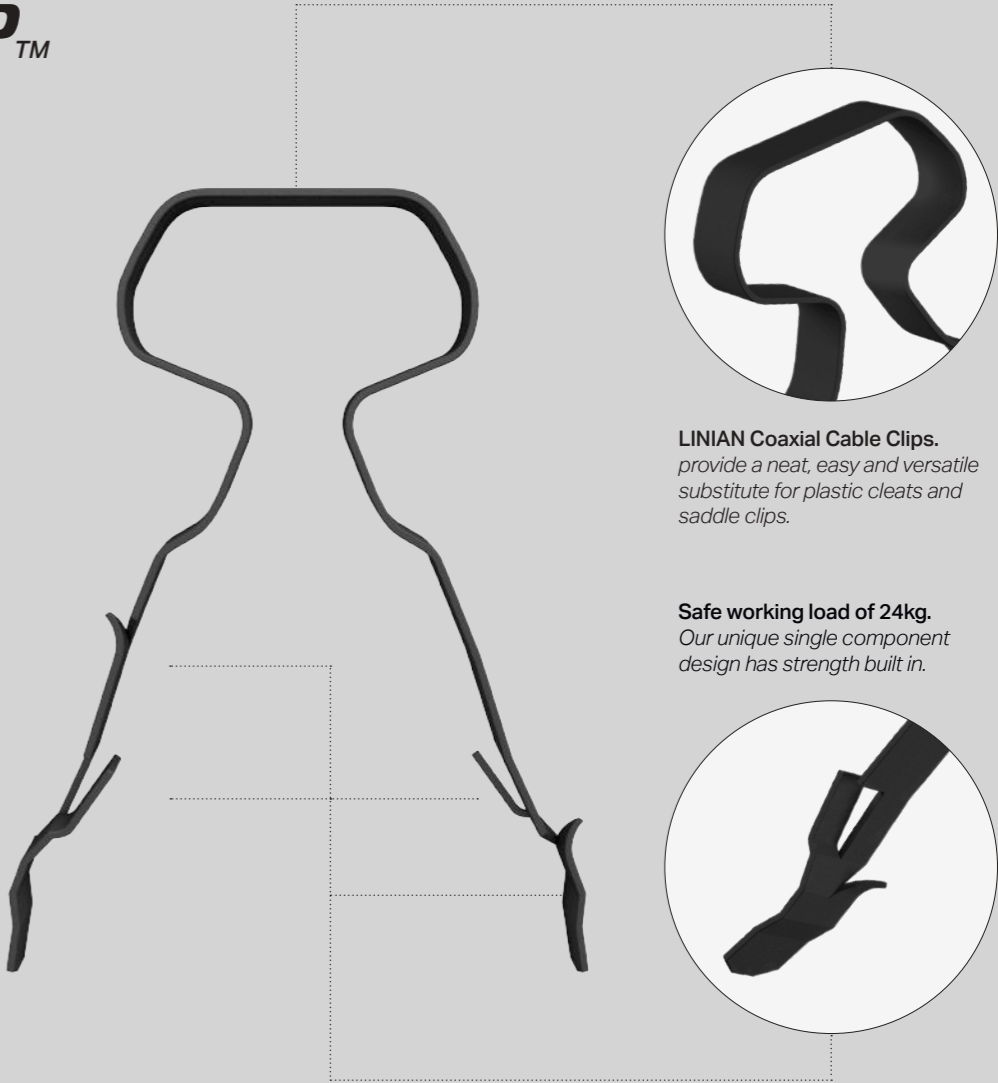


### FAST AND EASY TO INSTALL


**No need for plugs,  
screws and washers**  
– just drill your hole,  
slide our clip over  
the cable, and push  
it into the wall.

\*Softer substrates – Plaster,  
Plasterboard, etc.  
\*Harder substrates – Concrete,  
Masonry, Timber, etc.


**Drill a hole in  
your substrate.**  
We suggest  
a Ø5mm hole  
for softer  
substrates\*  
and Ø6mm  
for harder  
substrates\*  
to a depth  
of 30mm.

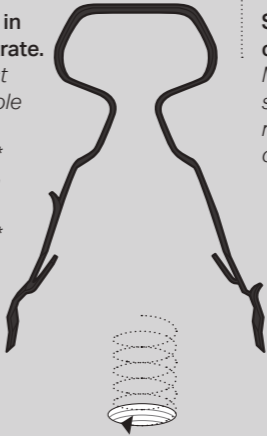

**Slide the clip  
over the cable.**  
Make sure it's  
seated in the  
rounded area  
of the clip.

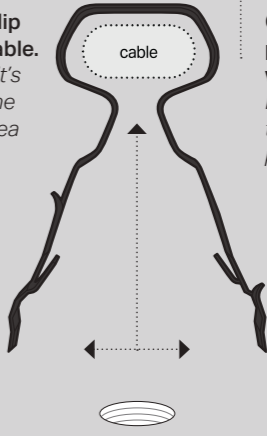

**Compress and  
push it into the  
wall.**  
Pinch the legs  
together and  
push into the

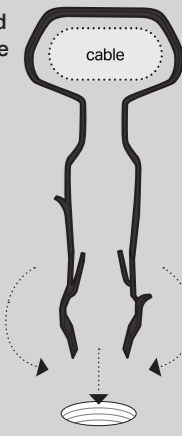

### THE INDUSTRY STANDARD

**Fast becoming the  
industry standard**  
– Coaxial Clip™ meets  
all current industry  
regulations, and  
surpasses a few too.

**British Standards:**  
– BS7671: Amendment 3  
– BS7671: 18th Edition 2018  
– BSEN50200 PH120  
– BS8519: 2010

**European Standards:**  
– DIN 4102-12 E90

**6mm — 13mm**  
RG59 B/U Coaxial +  
2 Power wires  
Shotgun cable.

**Versatile**  
Can hold cable from Ø6mm upto  
Ø13mm. Available in Black and white.



Incredibly Strong  
Invisibly Small

# NANO CLIP™

For fibre cables and other small diameter cables.



## NANO CLIP™


To fit: 2mm and 3mm

Salt-spray tested > 1000hrs  
Corrosion resistant and UV  
stable, suitable for indoor and  
outdoor use

18th Edition and  
Fire-Rated Cable Fixings,  
Safe and Compliant

90 & 120 minute fire  
resistant, meeting BSi  
and DIN classifications

Melt point > 1200 °C  
Tested to London  
Underground Standard for  
smoke emissions

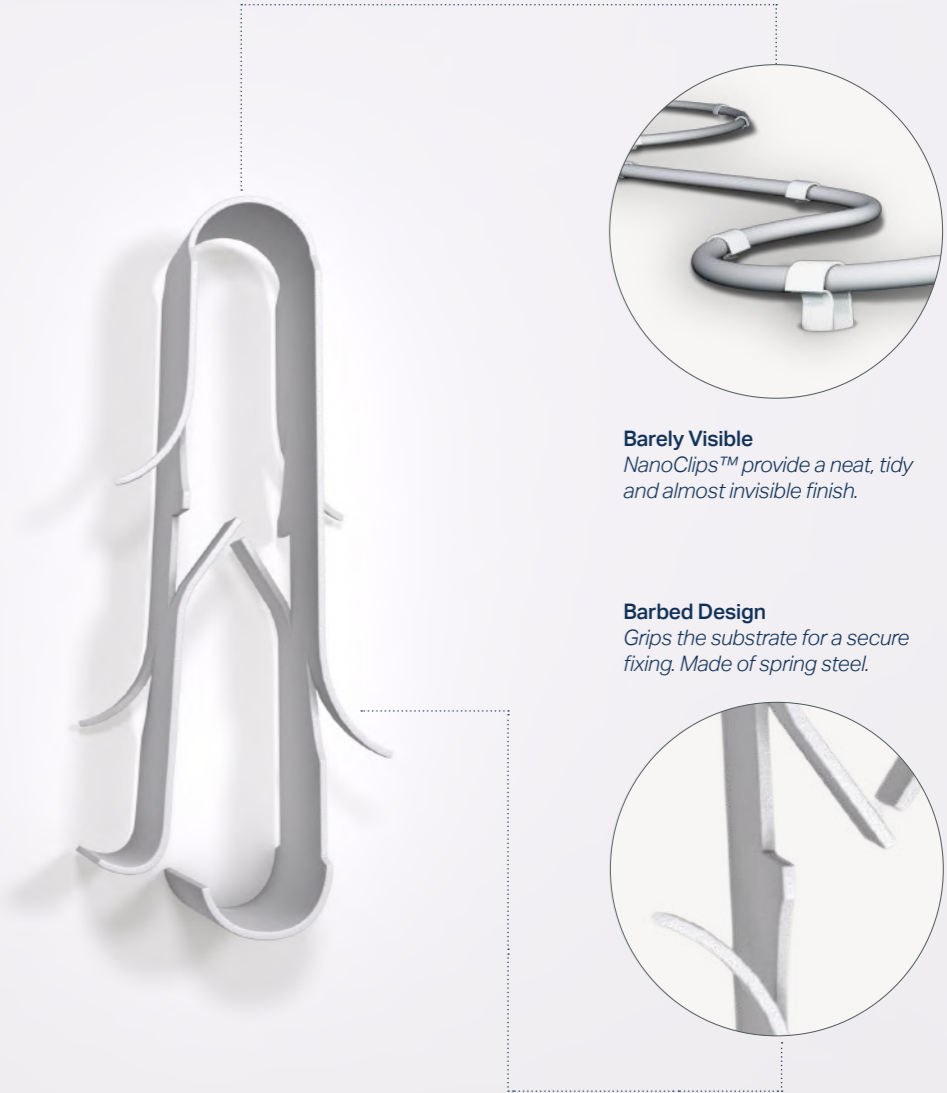

**Barely Visible**  
NanoClips™ provide a neat, tidy  
and almost invisible finish.


**Barbed Design**  
Grips the substrate for a secure  
fixing. Made of spring steel.

### FAST AND EASY TO INSTALL

No need for plugs,  
screws, washers or  
nail in clips – just drill  
your hole, slide our clip  
over the cable, and  
push it into the wall.

\*Softer substrates – Plaster,  
Plasterboard, etc.  
\*Harder substrates – Concrete,  
Masonry, Timber, etc.

Drill a hole in  
your substrate.  
We suggest a Ø3mm hole for  
softer substrates\* and Ø3.5mm –  
Ø4.5mm for harder substrates\*  
to a depth of 13.5mm.



Insert the cable into the open  
side of the clip.  
Make sure it stays seated in the  
side with the OPENING.



Push it into the  
wall.  
Pinch the legs  
together and  
push into the  
hole by hand.



### THE INDUSTRY STANDARD

Fast becoming the  
industry standard  
– Nano Clip™ meets  
all current industry  
regulations, and  
surpasses a few too.

British Standards:  
– BS7671: Amendment 3  
– BS7671: 18th Edition 2018  
– BSEN50200 PH120  
– BS8519: 2010

European Standards:  
– DIN 4102-12 E90

2mm — 3mm  
Fibre cables and other  
small diameter cables.

Versatile  
Can hold cable from Ø2mm upto  
Ø3mm. Available in white, black and  
brown.



For rapid Earth  
Rod installation

# EARTH ROD PRO™



Scan the QR code to watch LINIAN  
Earth Rod Pro™ installation video.



## EARTH ROD PRO RANGE™

**Threads onto any**  
standard earth rod

**Bores through** hard top  
layers and underground rock

**EARTH ROD MAX DRIVER**  
Attaches to your SDS drill

**EARTH ROD PRO DRIVER**  
Attaches to your SDS drill

**EARTH ROD DRILL BIT**  
Attaches directly  
to the earth rod




### FAST AND EASY TO INSTALL

Remove your  
chosen Driver and  
Drill Bit from the  
packaging.

Turn the Driver  
and Drill Bit onto  
each end of the  
earth rod and  
Insert the Driver  
into the SDS or  
SDS Max chuck.

You can apply some  
grease to the shafts  
for easier removal.

Using the SDS drill,  
drive the rod into  
the substrate to  
the required depth.



### SPECIFICATIONS

**Quality Standard:**  
All parts are produced  
in UK manufacturing  
facilities with an  
approved, certified  
Quality Management  
System compliant  
with ISO 901:2015.

**Threads:**  
All parts made concurrently  
on state of the art sliding head lathes  
to ensure perfect compatibility of 5/8"  
BSW threads with copper earth rods.

**Heat treatment:**  
Through-hardened to 45-55  
HRC Rockwell, Strikes the perfect  
balance of toughness in hammer  
drilling applications.

**Brazing:**  
Copper-brazing carbide tips  
at 1100 degrees Celsius to ensure  
an ultra-strong bond between tip  
and steel for extreme durability in  
the toughest drilling applications.

**Carbide Tip Specification:** European  
sourced 'Hammer-grade' Tungsten  
carbide tip designed to withstand  
hammer blows into the hardest of  
masonry substrates.


**Earth Rod Drill Bit**  
Standard Tip also available (without  
Carbide) for fast, economical installation  
into softer substrates.

**Drive Shanks:**  
Both our drive shanks are made  
to Bosch license specifications.


**Steel Specification:**  
High alloy content, chromium,  
nickel, molybdenum European steel.

LINIAN Product List

Part Number	Product Description	UOM
SAMPLES		
1SAMPLE	LINIAN Mini Sample Pack - Mixed Selection (Eg. 1LTEG001, 1LCB9112, 1LCR608, 1LSW2325). Contents may vary.	4
		
FIRECLIP RANGE		
1LCB406	LINIAN FireClip, Single, Black 4-6mm (1LCB406)(CC3)	100
1LCR406	LINIAN FireClip, Single, Red, 4-6mm (1LCR406)(CC3)	100
1LCW406	LINIAN FireClip, Single, White, 4-6mm (1LCW406)(CC3)	100
1LCC406	LINIAN FireClip, Single, Cream, 4-6mm (1LCC406)(CC3)	100
1LCCP406	LINIAN FireClip, Single, Copper, 4-6mm (1LCCP406)(CC3)	100
1LCO406	LINIAN FireClip, Single, Orange, 4-6mm (1LCO406)(CC3)	100
1LCP406	LINIAN FireClip, Single, Purple, 4-6mm (1LCP406)(CC3)	100
1LCBR406	LINIAN FireClip, Single, Brown, 4-6mm (1LCBR406)(CC3)	100
1LCB608	LINIAN FireClip, Single, Black, 6-8mm (1LCB608)(CC4)	100
1LCR608	LINIAN FireClip, Single, Red, 6-8mm (1LCR608)(CC4)	100
1LCW608	LINIAN FireClip, Single, White, 6-8mm (1LCW608)(CC4)	100
1LCC608	LINIAN FireClip, Single, Cream, 6-8mm (1LCC608)(CC4)	100
1LCCP608	LINIAN FireClip, Single, Copper, 6-8mm (1LCCP608)(CC4)	100
1LCO608	LINIAN FireClip, Single, Orange, 6-8mm (1LCO608)(CC4)	100
1LCP608	LINIAN FireClip, Single, Purple, 6-8mm (1LCP608)(CC4)	100
1LCY608	LINIAN FireClip, Single, Yellow, 6-8mm (1LCY608)(CC4)	100
1LCBR608	LINIAN FireClip, Single, Brown, 6-8mm (1LCBR608)(CC4)	100
1LCGR608	LINIAN FireClip, Single, Green, 6-8mm (1LCGR608)(CC4)	100
1LCB682	LINIAN FireClip, Double, Black, 6-8mm (1LCB682)(CC4x2)	100
1LCR682	LINIAN FireClip, Double, Red, 6-8mm (1LCR682)(CC4x2)	100
1LCW682	LINIAN FireClip, Double, White, 6-8mm (1LCW682)(CC4x2)	100
1LCC682	LINIAN FireClip, Double, Cream, 6-8mm (1LCC682)(CC4x2)	100
1LCCP682	LINIAN FireClip, Double, Copper, 6-8mm (1LCCP682)(CC4x2)	100
1LCO682	LINIAN FireClip, Double, Orange, 6-8mm (1LCO682)(CC4x2)	100
1LCP682	LINIAN FireClip, Double, Purple, 6-8mm (1LCP682)(CC4x2)	100
1LCY682	LINIAN FireClip, Double, Yellow, 6-8mm (1LCY682)(CC4x2)	100
1LCB911	LINIAN FireClip, Single, Black 9-11mm (1LCB911)(CC5)	100
1LCR911	LINIAN FireClip, Single, Red, 9-11mm (1LCR911)(CC5)	100
1LCW911	LINIAN FireClip, Single, White, 9-11mm (1LCW911)(CC5)	100
1LCC911	LINIAN FireClip, Single, Cream, 9-11mm (1LCC911)(CC5)	100
1LCCP911	LINIAN FireClip, Single, Copper, 9-11mm (1LCCP911)(CC5)	100
1LCO911	LINIAN FireClip, Single, Orange, 9-11mm (1LCO911)(CC5)	100
1LCP911	LINIAN FireClip, Single, Purple, 9-11mm (1LCP911)(CC5)	100

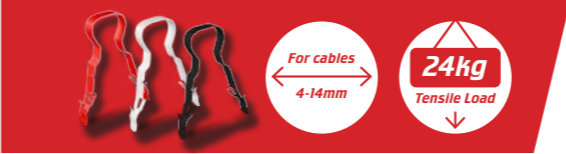
Part Number	Product Description	UOM
FIRECLIP RANGE		
1LCBLU911	LINIAN FireClip, Single, Blue, 9-11mm (1LCBLU911)(CC5)	100
1LCY911	LINIAN FireClip, Single, Yellow, 9-11mm (1LCY911)(CC5)	100
1LCBR911	LINIAN FireClip, Single, Brown, 9-11mm (1LCBR911)(CC5)	100
1LCGR911	LINIAN FireClip, Single, Green, 9-11mm (1LCGR911)(CC5)	100
1LCB9112	LINIAN FireClip, Double, Black, 9-11mm (1LCB9112)(CC5x2)	100
1LCR9112	LINIAN FireClip, Double, Red, 9-11mm (1LCR9112)(CC5x2)	100
1LCW9112	LINIAN FireClip, Double, White, 9-11mm (1LCW9112)(CC5x2)	100
1LCC9112	LINIAN FireClip, Double, Cream, 9-11mm (1LCC9112)(CC5x2)	100
1LCCP9112	LINIAN FireClip, Double, Copper, 9-11mm (1LCCP9112)(CC5x2)	100
1LCO9112	LINIAN FireClip, Double, Orange, 9-11mm (1LCO9112)(CC5x2)	100
1LCP9112	LINIAN FireClip, Double, Purple, 9-11mm (1LCP9112)(CC5x2)	100
1LCBLU9112	LINIAN FireClip, Double, Blue, 9-11mm (1LCBLU9112)(CC5x2)	100
1LCY9112	LINIAN FireClip, Double, Yellow, 9-11mm (1LCY9112)(CC5x2)	100
1LCGALV9112	LINIAN FireClip, Double, Galvanised, 9-11mm (1LCGALV9112)(CC5x2)	100
1LCW1114	LINIAN FireClip, Single, White, 11-14mm (1LCCW1114)(CC6)	100
1LCR1114	LINIAN FireClip, Single, Red, 11-14mm (1LCR1114)(CC6)	100
1LCB1114	LINIAN FireClip, Single, Black, 11-14mm (1LCB1114)(CC6)	100
1LCBR114	LINIAN FireClip, Single, Brown, 11-14mm (1LCBR1114)(CC6)	100
		
SUPERCLIP RANGE		
1LSB1214	LINIAN SuperClip, Black, 12-14mm (1LSB1214)(CC6)	25
1LSR1214	LINIAN SuperClip, Red, 12-14mm (1LST1214)(CC6)	25
1LSW1214	LINIAN SuperClip, White, 12-14mm (1LSW1214)(CC6)	25
1LSC1214	LINIAN SuperClip, Cream, 12-14mm (1LSC1214)(CC6)	25
1LSCP1214	LINIAN SuperClip, Copper, 12-14mm (1LSCP1214)(CC6)	25
1LSO1214	LINIAN SuperClip, Orange, 12-14mm (1LSO1214)(CC6)	25
1LSP1214	LINIAN SuperClip, Purple, 12-14mm (1LSP1214)(CC6)	25
1LSY1214	LINIAN SuperClip, Yellow, 12-14mm (1LSY1214)(CC6)	25
1LSBR1214	LINIAN SuperClip, Brown, 12-14mm (1LSBR1214)(CC6)	25
1LSB1518	LINIAN SuperClip, Black, 15-18mm (1LSB1518)(CC7)	25
1LSR1518	LINIAN SuperClip, Red, 15-18mm (1LSR1518)(CC7)	25
1LSW1518	LINIAN SuperClip, White, 15-18mm (1LSW1518)(CC7)	25
1LSC1518	LINIAN SuperClip, Cream, 15-18mm (1LSC1518)(CC7)	25
1LSCP1518	LINIAN SuperClip, Copper, 15-18mm (1LSCP1518)(CC7)	25
1LSO1518	LINIAN SuperClip, Orange, 15-18mm (1LSO1518)(CC7)	25
1LSP1518	LINIAN SuperClip, Purple, 15-18mm (1LSP1518)(CC7)	25
1LSY1518	LINIAN SuperClip, Yellow, 15-18mm (1LSY1518)(CC7)	25
1LSB1820	LINIAN SuperClip, Black, 18-20mm (1LSB1820)(CC8)	25

Part Number	Product Description	UOM
<b><i>SUPERCLIP RANGE</i></b>		
1LSR1820	LINIAN SuperClip, Red, 18-20mm (1LSR1820)(CC8)	25
1LSW1820	LINIAN SuperClip, White, 18-20mm (1LSW1820)(CC8)	25
1LSGALV1820	LINIAN SuperClip, Galv, 18-20mm (1LSGALV1820)(CC8)	25
1LSC1820	LINIAN SuperClip, Cream, 18-20mm (1LSC1820)(CC8)	25
1LSCP1820	LINIAN SuperClip, Copper, 18-20mm (1LSCP1820)(CC8)	25
1LSO1820	LINIAN SuperClip, Orange, 18-20mm (1LSO1820)(CC8)	25
1LSP1820	LINIAN SuperClip, Purple, 18-20mm (1LSP1820)(CC8)	25
1LSY1820	LINIAN SuperClip, Yellow, 18-20mm (1LSY1820)(CC8)	25
1LSB2022	LINIAN SuperClip, Black, 20-22mm (1LSB2022)(CC9)	25
1LSR2022	LINIAN SuperClip, Red, 20-22mm (1LSR2022)(CC9)	25
1LSW2022	LINIAN SuperClip, White, 20-22mm (1LSW2022)(CC9)	25
1LSGALV2022	LINIAN SuperClip, Galv, 20-22mm (1LSGALV2022)(CC9)	25
1LSC2022	LINIAN SuperClip, Cream, 20-22mm (1LSC2022)(CC9)	25
1LSCP2022	LINIAN SuperClip, Copper, 20-22mm (1LSCP2022)(CC9)	25
1LSO2022	LINIAN SuperClip, Orange, 20-22mm (1LSO2022)(CC9)	25
1LSP2022	LINIAN SuperClip, Purple, 20-22mm (1LSP2022)(CC9)	25
1LSY2022	LINIAN SuperClip, Yellow, 20-22mm (1LSY2022)(CC9)	25
1LSB2325	LINIAN SuperClip, Black, 23-25mm (1LSB2325)(CC10)	25
1LSR2325	LINIAN SuperClip, Red, 23-25mm (1LSR2325)(CC10)	25
1LSW2325	LINIAN SuperClip, White, 23-25mm (1LSW2325)(CC10)	25
1LSGALV2325	LINIAN SuperClip, Galv, 23-25mm (1LSGALV2325)(CC10)	25
1LSC2325	LINIAN SuperClip, Cream, 23-25mm (1LSC2325)(CC10)	25
1LSCP2325	LINIAN SuperClip, Copper, 23-25mm (1LSCP2325)(CC10)	25
1LSO2325	LINIAN SuperClip, Orange, 23-25mm (1LSO2325)(CC10)	25
1LSP2325	LINIAN SuperClip, Purple, 23-25mm (1LSP2325)(CC10)	25
1LSY2325	LINIAN SuperClip, Yellow, 23-25mm (1LSY2325)(CC10)	25

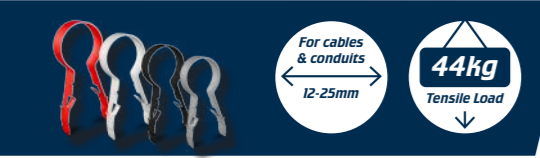


<b><i>T&amp;E RANGE</i></b>		
1LTEG001	LINIAN T & E Clip, Grey, 1mm (1LTEG001)	100
1LTEW001	LINIAN T & E Clip, White, 1mm (1LTEW001)	100
1LTEG001.5	LINIAN T & E Clip, Grey, 1.5mm (1LTEG001.5)	100
1LTEW001.5	LINIAN T & E Clip, White, 1.5mm (1LTEW001.5)	100
1LTEG002.5	LINIAN T & E Clip, Grey, 2.5mm (1LTEG002.5)	100
1LTEW002.5	LINIAN T & E Clip, White, 2.5mm (1LTEW002.5)	100
1LTEG004	LINIAN T & E Clip, Grey, 4mm (1LTEG004)	100
1LTEW004	LINIAN T & E Clip, White, 4mm (1LTEW004)	100
1LTEG006	LINIAN T & E Clip, Grey, 6mm (1LTEG006)	100
1LTEW006	LINIAN T & E Clip, White, 6mm (1LTEW006)	100

Part Number	Product Description	UOM
<b><i>T&amp;E RANGE</i></b>		
1LTEG010	LINIAN T & E Clip, Grey, 10mm (1LTEG010)	100
1LTEW010	LINIAN T & E Clip, White, 10mm (1LTEW010)	100

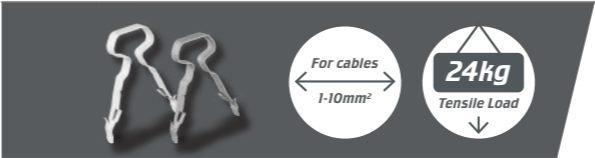


<b><i>COAXIAL RANGE</i></b>		
1LCABT004	LINIAN RG59 Coaxial Cable Clip (Shotgun), Black, 4mm (1LCABT004)	100
1LCAWT004	LINIAN RG59 Coaxial Cable Clip (Shotgun), White, 4mm (1LCAWT004)	100

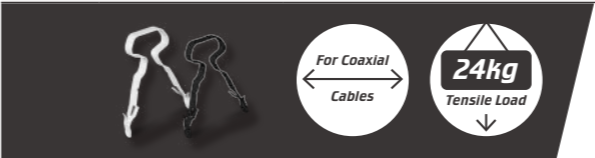

<b><i>EARTH PRO</i></b>		
1LERPD	LINIAN Earth Rod Pro Driver (SDS+)	1
1LERPM	LINIAN Earth Rod Pro Max Driver	1
1LERPB	LINIAN Earth Rod Pro Bit	1
1LERPB5	LINIAN Earth Rod Pro Bit, Carbide Tip (Pack x 5)	5
1LERPB10	LINIAN Earth Rod Pro Bit , Carbide Tip (Pack x 10)	10
1LERPB25	LINIAN Earth Rod Pro Bit Carbide Tip (Pack x 25)	25



<b><i>NANOCLIP RANGE</i></b>		
1LCW002	LINIAN NanoClip, White, 2mm (1LCW002)	100
1LCW003	LINIAN NanoClip, White, 3mm (1LCW003)	100
1LCB002	LINIAN NanoClip, Black, 2mm (1LCB002)	100
1LCB003	LINIAN NanoClip, Black, 3mm (1LCB003)	100
1LCBR002	LINIAN NanoClip, Brown, 2mm (1LCBR002)	100
1LCBR003	LINIAN NanoClip, Brown, 3mm (1LCBR003)	100

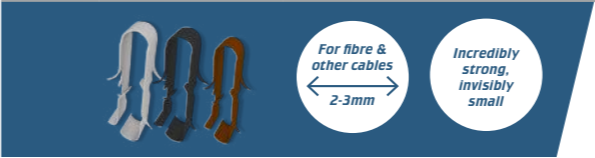

<b><i>CABLE TIE PACKS</i></b>		
2LCG0911CT300	LINIAN CABLE TIE PACK, 10 x FireClips (1LCGALV911, 9-11mm), 10 x Steel Cable Ties (300 x 4.8 A316 S/S)	20
2LSCG01518CT300	LINIAN Super Strength CABLE TIE PACK, 10 x SuperClips (1LSGALV1518, 15-18mm), 10 x Steel Cable Ties (300 x 4.8 A316 S/S)	20

# Standard Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
1mm²	8mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm²	8.1mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
2.5mm²	9.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x 2 cable)	1LC(X)911 OR 1LC(X)9112
4mm²	11.6mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
3 CORE			
1mm²	8.2mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm²	8.4mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
2.5mm²	10.4mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
4mm²	12.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4 CORE			
1mm²	8.5mm	6-8mm Single (x1 cable) OR 6-8mm Double (x2 cables)	1LC(X)608 OR 1LC(X)682
1.5mm²	10mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm²	11.9mm	9-11mm Double	1LC(X)9112
4mm²	13.5mm	12-14mm SuperClip (single cable only)	1LS(X)1214

DISCLAIMER: sizing may vary slightly according to manufacturer

# Standard Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE			
1mm²	12.1mm	12-14mm SuperClip (single cable only)	1LS(X)1214
1.5mm²	13.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	16.3mm	15-18mm SuperClip (single cable only)	1LS(X)1518
12 CORE			
1.5mm²	17.5mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm²	21.7mm	20-22mm SuperClip (single cable only)	1LS(X)2022
19 CORE			
1.5mm²	20.5mm	20-22mm SuperClip (single cable only)	1LS(X)2022

DISCLAIMER: sizing may vary slightly according to manufacturer

# Enhanced Fire Rated Soft Skin Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
1.5mm²	9.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm²	11.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
4mm²	12.2mm	12-14mm SuperClip (single cable only)	1LS(X)1214
3 CORE			
1.5mm²	11.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	12.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	14mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4 CORE			
1.5mm²	12.5mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm²	13.5mm	9-11mm Double	1LC(X)9112
4mm²	14.7mm	12-14mm SuperClip (single cable only)	1LS(X)1214

DISCLAIMER: sizing may vary slightly according to manufacturer

# Fire Rated Heavy Duty SWA Power Cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE			
4mm²	21mm	20-22mm SuperClip (single cable only)	1LS(X)2022
6mm²	21mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	23mm	23-25mm SuperClip (single cable only)	1LS(X)2325
16mm²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE			
4mm²	22mm	20-22mm SuperClip (single cable only)	1LS(X)2022
6mm²	21mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
4 CORE			
4mm²	13.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm²	15.5mm	15-18mm SuperClip (single cable only)	1LS(X)1518
NB: for larger diameter cables - larger clips are under development			
5 CORE			
4mm²	24mm	23-25mm SuperClip (single cable only)	1LS(X)2325
6mm²	24mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

# Fire Rated SWA cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA			
1.5mm²	13.5mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	14.8mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	15.8mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
6mm²	16.6mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
10mm²	19.9mm	18-20mm SuperClip (Single cable only)	1LS(X)1820
16mm²	22mm	20-22mm SuperClip (Single cable only)	1LS(X)2022
25mm²	26mm	23-25mm SuperClip (single cable only)	1LS(X)2325
3 CORE			
1.5mm²	13.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	15.5mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
4mm²	16.4mm	15-18mm SuperClip 3(Single cable only)	1LS(X)1518
6mm²	17.9mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
10mm²	22mm	20-22mm SuperClip (Single cable only)	1LS(X)2022
16mm²	24mm	23-25mm SuperClip (single cable only)	1LS(X)2325

DISCLAIMER: sizing may vary slightly according to manufacturer

# Fire Rated SWA cable

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE			
1.5mm²	13.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	16.9mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	17.7mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	21mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	24mm	23-25mm SuperClip (single cable only)	1LS(X)2325
16mm²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325
25mm²	26mm	23-25mm SuperClip (single cable only)	1LS(X)2325
5 CORE			
1.5mm²	15.6mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm²	17.3mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	18.8mm	18-20mm SuperClip (single cable only)	1LS(X)1820
6mm²	23mm	23-25mm SuperClip (single cable only)	1LS(X)2325
10mm²	25mm	23-25mm SuperClip (single cable only)	1LS(X)2325

NB: for larger diameter cables - larger clips are under development

DISCLAIMER: sizing may vary slightly according to manufacturer

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
218Y PVC 2 CORE			
0.5mm²	5.2mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
218Y PVC 3 CORE			
0.5mm²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm²	5.mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
0.75mm²	5.6mm	4-6mm Single (9-11mm single 2 cables)	1LC(X)406 (1LC(X)911
2.5mm²	17.05mm	15-18mm SuperClip (single cable only)	1LS(X)1518
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	14.68mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm²	15.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	18.63mm	18-20mm SuperClip (single cable only)	1LS(X)1820
16mm²	20.78mm	20-22mm SuperClip (single cable only)	1LS(X)2022
25mm²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325

DISCLAIMER: sizing may vary slightly according to manufacturer

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	20.1mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	22.4mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	19.05mm	18-20mm SuperClip (single cable only)	1LS(X)1820
10mm²	22.06mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

PVC Insulated Flex

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	18.96mm	18-20mm SuperClip (single cable only)	1LS(X)1820
6mm²	21.6mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	18.9mm	18-20mm SuperClip (Single cable only)	1LS(X)1820
2.5mm²	21.76mm	20-22mm SuperClip (Single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA : BROWN & BLUE			
1.5mm	11.06mm	9-11mm Single (x1 cable) OR 9-11mm Double (x2 cable)	1LC(X)911 OR 1LC(X)9112
2.5mm	12.4mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm	13.38mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm	14.38mm	12-14mm SuperClip (single cable only)	1LS(X)1214
10mm	16.18mm	15-18mm SuperClip (single cable only)	1LS(X)1518
16mm	19.06mm	18-20mm SuperClip (single cable only)	1LS(X)1820
25mm	20mm	18-20mm SuperClip (single cable only)	1LS(X)1820
35mm	23.2mm	23-25mm SuperClip (single cable only)	1LS(X)2325
50mm	25.1mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	14.68mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
⚡ 6mm²	15.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	18.63mm	18-20mm SuperClip (single cable only)	1LS(X)1820
16mm²	20.78mm	20-22mm SuperClip (single cable only)	1LS(X)2022
25mm²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
⚡ Depending on the manufacturer!			

DISCLAIMER: sizing may vary slightly according to manufacturer

# SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	20.1mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	22.4mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	19.05mm	18-20mm SuperClip (single cable only)	1LS(X)1820
10mm²	22.06mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

# SWA Armoured Power Cable Standard

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	18.96mm	18-20mm SuperClip (single cable only)	1LS(X)1820
6mm²	21.6mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	18.9mm	18-20mm SuperClip (single cable only)	1LS(X)1820
2.5mm²	21.76mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

# SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
2 CORE SWA : BROWN & BLUE			
1.5mm²	12.3mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	12.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	13.9mm	12-14mm SuperClip (single cable only)	1LS(X)1214
6mm²	15mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	17.05mm	15-18mm SuperClip (single cable only)	1LS(X)1518
16mm²	19.5mm	18-20mm SuperClip (single cable only)	1LS(X)1820
25mm²	22.1mm	23-25mm SuperClip (single cable only)	1LS(X)2325
35mm²	24.95mm	23-25mm SuperClip (single cable only)	1LS(X)2325
50mm²	25.4mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
3 CORE SWA BROWN, BLACK & GREY			
1.5mm²	12.17mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	13.55mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	14.68mm	15-18mm SuperClip (Single cable only)	1LS(X)1518
6mm²	15.14mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	18.63mm	18-20mm SuperClip (single cable only)	1LS(X)1820
16mm²	20.78mm	20-22mm SuperClip (single cable only)	1LS(X)2022
25mm²	24.9mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

NB: for larger diameter cables - larger clips are under development

DISCLAIMER: sizing may vary slightly according to manufacturer

# SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Cable Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
4 CORE SWA: BROWN, BLACK, GREY & BLUE			
1.5mm²	12.88mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	14.43mm	12-14mm SuperClip (single cable only)	1LS(X)1214
4mm²	16.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	17.87mm	15-18mm SuperClip (single cable only)	1LS(X)1518
10mm²	20.1mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	22.4mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
5 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	13.72mm	12-14mm SuperClip (single cable only)	1LS(X)1214
2.5mm²	15.46mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	17.38mm	15-18mm SuperClip (single cable only)	1LS(X)1518
6mm²	19.05mm	18-20mm SuperClip (single cable only)	1LS(X)1820
10mm²	22.06mm	20-22mm SuperClip (single cable only)	1LS(X)2022
16mm²	24.14mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			

NB: for larger diameter cables - larger clips are under development

DISCLAIMER: sizing may vary slightly according to manufacturer

# SWA Armoured Power Cable LS(H)F

Cable Size		Recommended Clip Size	Part Number
Nominal Cable Cross Sectional Area	Actual Overall Diameter		(x) = colour i.e. B for black, R for Red, W for white and GALV for Galvanised
7 CORE SWA: WHITE NUMBERED WITH BLACK PRINT			
1.5mm²	14.65mm	15-18mm SuperClip (single cable only)	1LS(X)1518
2.5mm²	16.53mm	15-18mm SuperClip (single cable only)	1LS(X)1518
4mm²	18.96mm	18-20mm SuperClip (single cable only)	1LS(X)1820
6mm²	21.6mm	20-22mm SuperClip (single cable only)	1LS(X)2022
10mm²	25.3mm	23-25mm SuperClip (single cable only)	1LS(X)2325
NB: for larger diameter cables - larger clips are under development			
12 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	18.9mm	18-20mm SuperClip (single cable only)	1LS(X)1820
2.5mm²	21.76mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
19 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (Single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
27 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			
37 CORE SWA: WHITE NUMBERED CORES WITH BLACK PRINT			
1.5mm²	21.99mm	20-22mm SuperClip (single cable only)	1LS(X)2022
NB: for larger diameter cables - larger clips are under development			

DISCLAIMER: sizing may vary slightly according to manufacturer

# Conduit

Conduit Size	Recommended Clip Size	Part Number
Actual Overall Diameter		
GALVANISED		
16mm	15-18mm SuperClip (Galvanised)	1LSGALV1518
20mm	18-20mm SuperClip (Galvanised)	1LSGALV1820
25mm	23-25mm SuperClip (Galvanised)	1LSGALV2325
BLACK ENAMEL		
16mm	15-18mm SuperClip (Black)	1LSB1518
20mm	18-20mm SuperClip (Black)	1LSB1820
25mm	23-25mm SuperClip (Black)	1LSB2325
WHITE PVC		
16mm	15-18mm SuperClip (White)	1LSW1518
20mm	18-20mm SuperClip (White)	1LSW1820
25mm	23-25mm SuperClip (White)	1LSW2325
BLACK PVC		
16mm	15-18mm SuperClip (Black)	1LSB1518
20mm	18-20mm SuperClip (Black)	1LSB1820
25mm	23-25mm SuperClip (Black)	1LSB2325

DISCLAIMER: sizing may vary slightly according to manufacturer

Conduit

Conduit Size		Recommended Clip Size	Part Number
Actual Overall Diameter			
BLACK FLEXIBLE			
	10mm	9-11mm Fireclip (Black)	1LCB911
	16mm	15-18mm SuperClip (Black)	1LSB1518
	20mm	18-20mm SuperClip (Black)	1LSB1820
	25mm	23-25mm SuperClip (Black)	1LSB2325
WHITE FLEXIBLE			
	10mm	9-11mm Fireclip (White)	1LCW911
	16mm	15-18mm SuperClip (White)	1LSW1518
	20mm	18-20mm SuperClip (White)	1LSW1820
	25mm	23-25mm SuperClip (White)	1LSW2325
GALVANISED FLEXIBLE			
	10mm	9-11mm Fireclip (Galv)	1LCGALV911
	16mm	15-18mm SuperClip (Galv)	1LSGALV1518
	20mm	18-20mm SuperClip (Galv)	1LSGALV1820
	25mm	23-25mm SuperClip (Galv)	1LSGALV2325

DISCLAIMER: sizing may vary slightly according to manufacturer

SUBSTRATES

The LINIAN clip is a single-component, 18th Edition-compliant, fire-rated fixing that can be used in various substrates.

LINIAN Clips are suitable for use in the following substrates:

- Plasterboard (Pull-out load reduced to 5kg.)
- Masonry
- Light Block
- Heavy Block
- Hollow Block
- Hollow Brick
- Brick
- Concrete
- Timber
- Stone

SPECIALIST COLOURS AVAILABLE

MOQs and lead times may apply.  
Available from Wholesalers only.

RAL 1000	RAL 1001	RAL 1002	RAL 1003	RAL 1004	RAL 1005	RAL 1006	RAL 1007	RAL 1011	RAL 1012
RAL 1013	RAL 1014	RAL 1015	RAL 1016	RAL 1017	RAL 1018	RAL 1019	RAL 1020	RAL 1021	RAL 1023
RAL 1024	RAL 1026	RAL 1027	RAL 1028	RAL 1032	RAL 1033	RAL 1034	RAL 1035	RAL 1036	RAL 1037
RAL 2000	RAL 2001	RAL 2002	RAL 2003	RAL 2004	RAL 2005	RAL 2007	RAL 2008	RAL 2009	RAL 2010
RAL 2011	RAL 2012	RAL 2013	RAL 3000	RAL 3001	RAL 3002	RAL 3003	RAL 3004	RAL 3005	RAL 3007
RAL 3009	RAL 3011	RAL 3012	RAL 3013	RAL 3014	RAL 3015	RAL 3016	RAL 3017	RAL 3018	RAL 3020
RAL 3022	RAL 3024	RAL 3026	RAL 3027	RAL 3028	RAL 3031	RAL 3032	RAL 3033	RAL 4001	RAL 4002
RAL 4003	RAL 4004	RAL 4005	RAL 4006	RAL 4007	RAL 4008	RAL 4009	RAL 4010	RAL 4011	RAL 4012
RAL 5000	RAL 5001	RAL 5002	RAL 5003	RAL 5004	RAL 5005	RAL 5007	RAL 5008	RAL 5009	RAL 5010
RAL 5011	RAL 5012	RAL 5013	RAL 5014	RAL 5015	RAL 5017	RAL 5018	RAL 5019	RAL 5020	RAL 5021
RAL 5022	RAL 5023	RAL 5024	RAL 5025	RAL 5026	RAL 6000	RAL 6001	RAL 6002	RAL 6003	RAL 6004
RAL 6005	RAL 6006	RAL 6007	RAL 6008	RAL 6009	RAL 6010	RAL 6011	RAL 6012	RAL 6013	RAL 6014
RAL 6015	RAL 6016	RAL 6017	RAL 6018	RAL 6019	RAL 6020	RAL 6021	RAL 6022	RAL 6024	RAL 6025
RAL 6026	RAL 6027	RAL 6028	RAL 6029	RAL 6032	RAL 6033	RAL 6034	RAL 6035	RAL 6036	RAL 6037
RAL 6038	RAL 7000	RAL 7001	RAL 7002	RAL 7003	RAL 7004	RAL 7005	RAL 7006	RAL 7008	RAL 7009
RAL 7010	RAL 7011	RAL 7012	RAL 7013	RAL 7015	RAL 7016	RAL 7021	RAL 7022	RAL 7023	RAL 7024
RAL 7026	RAL 7030	RAL 7031	RAL 7032	RAL 7033	RAL 7034	RAL 7035	RAL 7036	RAL 7037	RAL 7038
RAL 7039	RAL 7040	RAL 7042	RAL 7043	RAL 7044	RAL 7045	RAL 7046	RAL 7047	RAL 7048	RAL 8000
RAL 8001	RAL 8002	RAL 8003	RAL 8004	RAL 8007	RAL 8008	RAL 8011	RAL 8012	RAL 8014	RAL 8015
RAL 8016	RAL 8017	RAL 8019	RAL 8022	RAL 8023	RAL 8024	RAL 8025	RAL 8028	RAL 8029	RAL 9001
RAL 9002	RAL 9003	RAL 9004	RAL 9005	RAL 9006	RAL 9007	RAL 9010	RAL 9011	RAL9016	RAL 9017
RAL 9018	RAL 9022	RAL 9023							

Standard colours include Red, Black, White, Grey, and Galvanised.

SMALL PARTS COATING

We coat small parts!


Small Parts Coating (LINIAN SPC) is a direct subcontract of LINIAN, our family-run manufacturing company, renowned for Faster, Safer, Simpler products.

At LINIAN, we weren't content to settle for dull colours, chipped paint, or toxic smoke emissions. We needed a better solution, so, we developed and invested in our own state-of-the-art coating plant. Our coating is corrosion resistant, chip resistant, UV stable, and suitable for both indoor and outdoor use. Our state-of-the-art coating plant can coat large quantities of small parts to any RAL colour. That's over 1,000 different colours!

We now use our premium coating for all LINIAN clips, and LINIAN customers are continually impressed with the durable and professional finish. But we don't just want to keep this special coating to ourselves. Our coating can be applied to mass produced small parts such as rivets, screws, and buttons, and works with a whole variety of materials including metal, glass, wood, and plastic. That's why we're launching Small Parts Coating.

At Small Parts Coating, we are happy to discuss any mass-coating project, big or small. We work with manufacturers across any industry including automotive, electrical, textiles and design.

Contact us today to discuss your coating requirements:  
info@smallpartskoating.co.uk  
Tel: 0141 212 5886

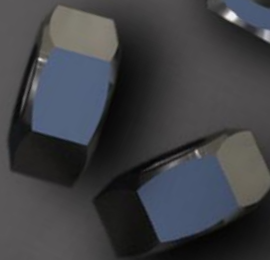

LINIAN LABS  
Product Development Services

At LINIAN, we derive innovation from our own market experience and the needs of installers, designers and educators. Our research and development team are continually working on new ideas.

Can't find the product you need?  
Can't solve the problem with any off the shelf LINIAN solutions?

We are product developers and innovators at our very core. If you have an idea for a faster, safer, simpler product, get in touch today to discuss our product development service. We can support you to get your very own product on the market.



# BECOME A LINIAN STOCKIST

At LINIAN, we believe wholesalers and manufacturers should provide only the best products, services and pricing to their customers. That's why we're committed to creating the highest quality products, backed by extensive testing and manufactured in the UK.

## WHY STOCK LINIAN?

With LINIAN, you can rest assured you are giving your customers the highest quality, UK-manufactured products to get the job done faster, safer, simpler...and tidier. Installers will thank you when they realise how much time and labour savings they can make using LINIAN!

## WHAT WILL YOU RECEIVE?

As a LINIAN stockist, you will have access to LINIAN's full range of solutions for the Electrical, Fire and Fibre markets, and be the first to know about innovative new products and releases. You will also receive:

### - Website Listing


As an official stockist, you will be shown on the LINIAN stockist map - boosting your online presence!

### - Free Slat Wall Display

With all stock profile orders, you'll receive a LINIAN welcome pack including a free point-of-sale slat wall display, mini sample packs, LINIAN literature and merchandise.

### - Digital Marketing Pack

LINIAN will provide you with a suite of video and social media content and trade counter display videos - helping both your staff and customers understand the advantages of LINIAN products.

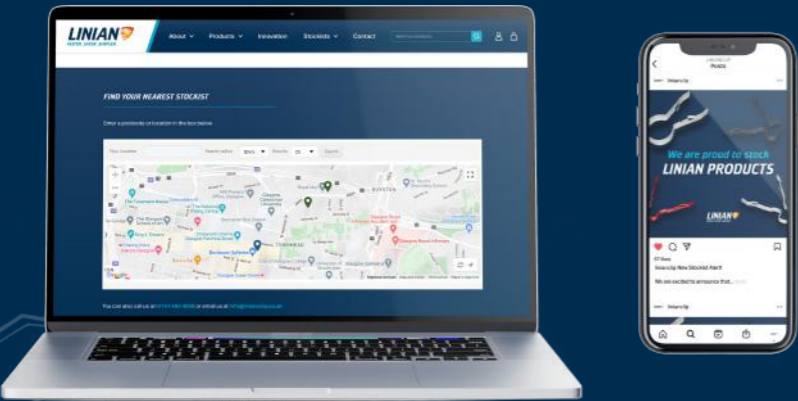

# JOIN THE LINIAN COMMUNITY

Have you joined the LINIAN #InstallationRevlolution?

# SPARKYSHARE



@abnintegratedservicesltd



@carey\_electrical\_ltd



@southcoastev

# TESTIMONIALS

"The clips are great and easier and quicker to install than the standard p-clip, screw, and rawlplug. I would now use the LINIAN Clip on future installations."  
**Project Engineer, Balfour Beatty Kilpatrick.**

"Great product, made in the UK by a great company."  
**Giffords Electrical @giffordselectrical, Instagram**

"Super quick friendly and efficient service."  
**RW Electrical Services @services\_rw, Twitter**

"Not only are they easy to use but they save us so much time and labour when cabling."  
**Abel Alarms, Glasgow. National Fire and Security installer, in business for over 50 years.**

